


0.5 CUFT and 1 CUFT CLASSIC BLAST MACHINE PACKAGES with APOLLO LP

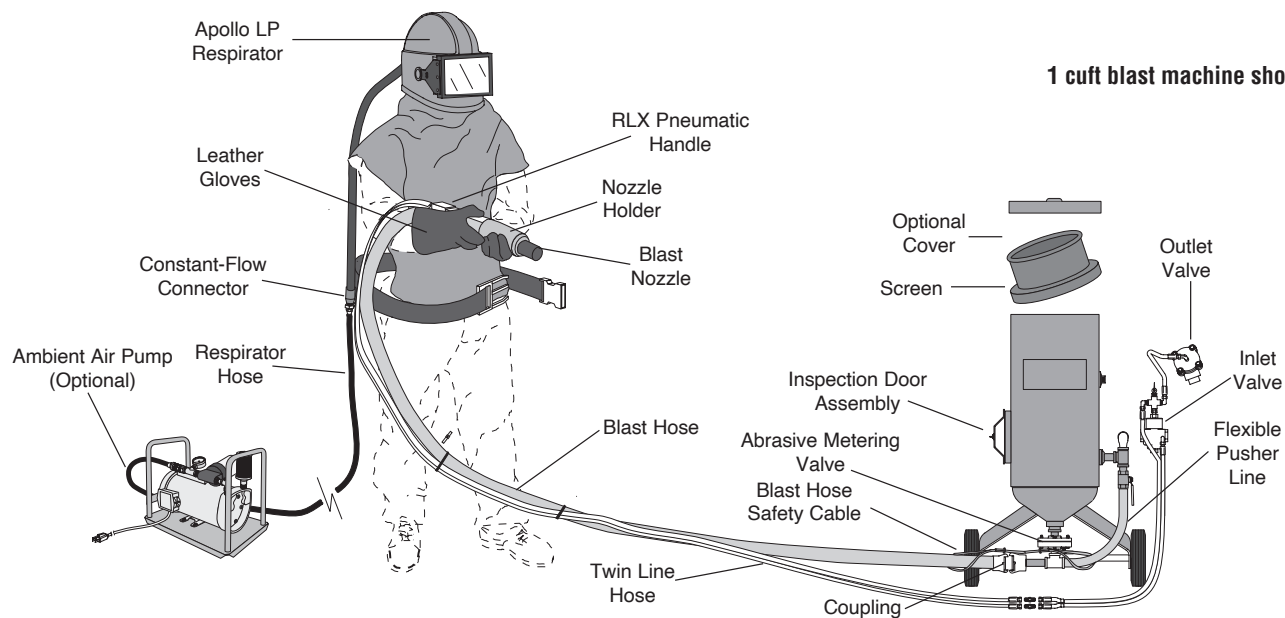

Always Recommend CO Monitors - Section 10, page 13-15

Blast machine packages on this page have TLR pneumatic pressure-release remote controls. Each package also includes an **Apollo 20 LP DLX helmet for use with an ambient air pump** as the breathing-air source. **All standard 0.5 and 1.0 cuft blast machines have a working pressure rating of 125 psi.** Blast machine capacities, stated in pounds, refer to abrasives (such as mineral slag) which weigh about 100 lbs per cuft. Comparatively, steel grit weighs 250 lbs per cuft.

Blast Machines Packages with 1/2" piping	1028 (0.5 cuft) 50 lbs. / 10" dia.	1042 (1 cuft) 100 lbs / 10" dia.
--	------------------------------------	----------------------------------

	Stock No.	Stock No.
TLR-50 remote controls (includes 10565 RLX handle)	02518	02518
MSV 1/2" abrasive metering valve	01247	01247
25 ft. X 1/2" ID blast hose, coupled	01268	01268
CHE-1/2 aluminum nozzle holder (included in 01268)	00577	00577
CQA-1/2 aluminum quick coupling (included in 01268)	00599	00599
Blast hose safety cable	15012	15012
1/2" Air filter with manual drain	01308	01308
CT-4 blast nozzle	01353	01353
Blast machine screen (optional steel cover)	03362 (03107)	03362 (03107)
Nylon tie (eight included with system)	02195 (each)	02195 (each)
Apollo 20 HP DLX helmet with Constant Flow Connector	21299	21299
50 ft respirator hose	22510	22510
One pair leather gloves	02243	02243
One 25-pack Apollo 20 outer lens	21411	21411
One 10-pack quick coupling gaskets	00850	00850
One 10-pack nozzle washers	21580	21580
Outlet valve diaphragms (three included with system)	02511 (each)	02511 (each)
Stock No. (complete system)	23890	23891
Weight (lbs.)	185	205

Ambient Air Pumps (Optional)	Single Op. (shown above)	Four Op. (stationary frame)	Four Op. (2-wheel cart)
Stock No.	25908	22530	22384
Weight (lbs.)	65	175	180